




Serigrafica automatica
Automatic screen printing machine

S2 700



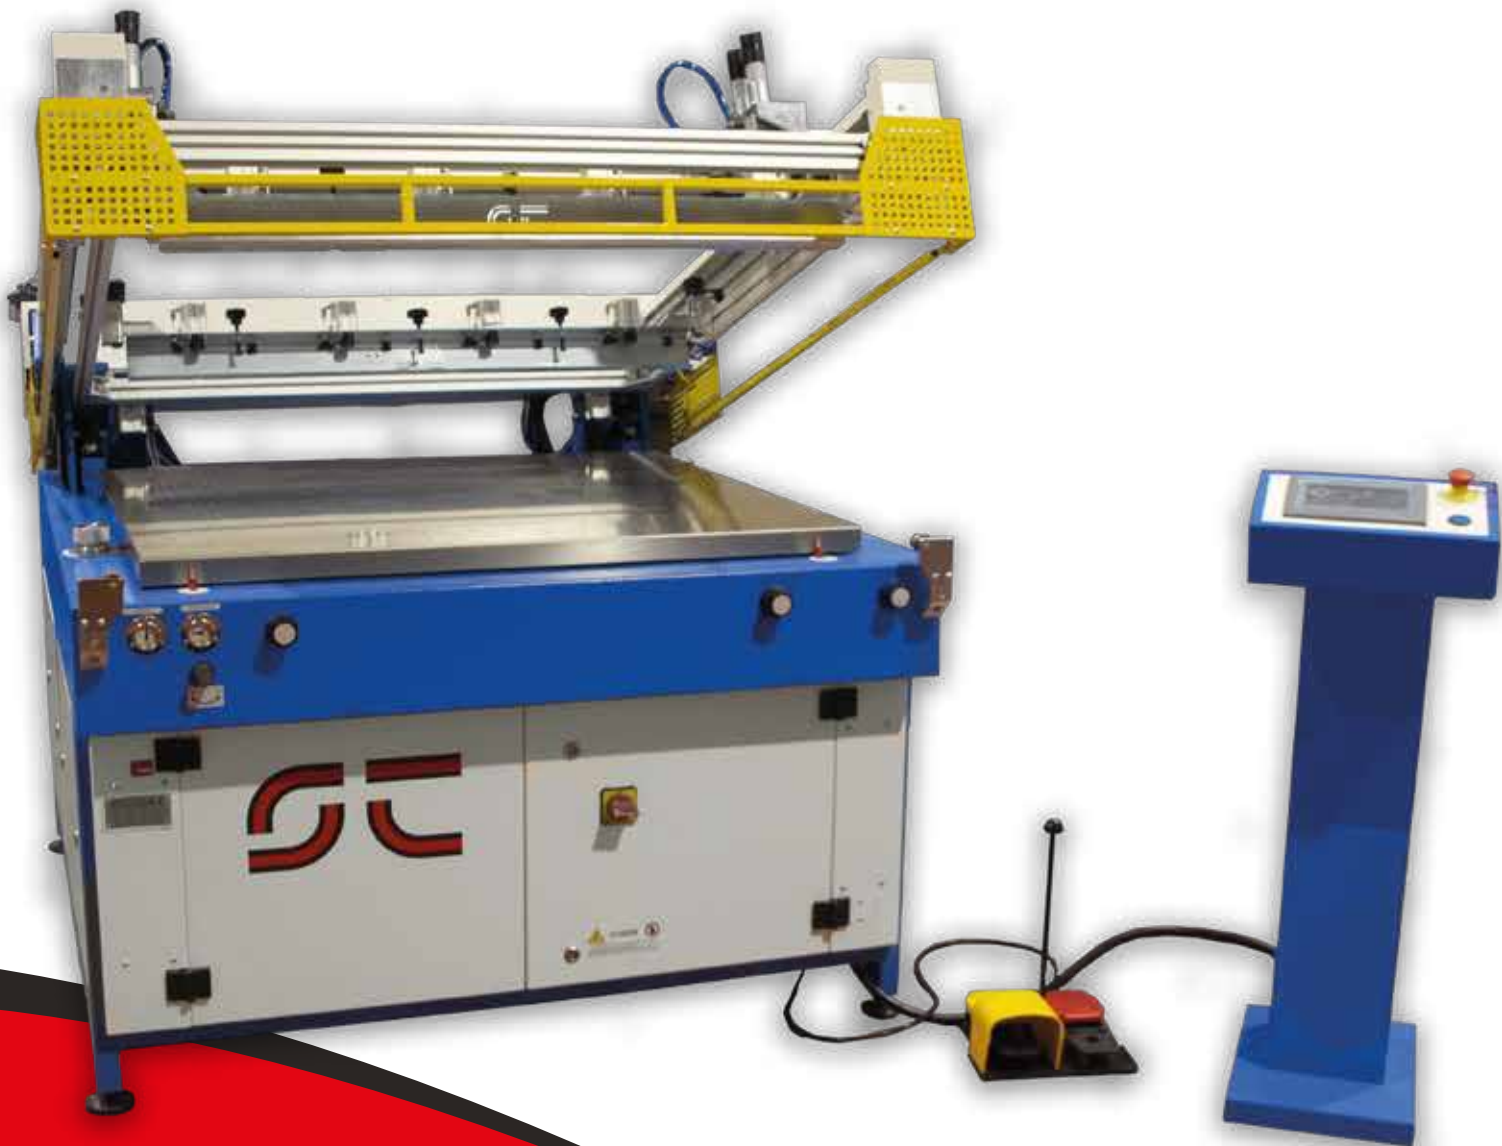

Serigrafica automatica S2



L'S2-700 è una macchina serigrafica automatica a libro, ideale per stampare su tutti i materiali rigidi e flessibili.

Dotata di svariate regolazioni e dispositivi, quali:

- Scambio raclea-raschietto pneumatica
- Regolazione dell' inclinazione della raclea e del raschietto manuale
- Barre porta telai regolabili in altezza per fuori contatto
- Stacco telaio pneumatico con regolazione manuale
- Bloccaggio telaio pneumatico
- 3 cicli operativi manuale, semi e automatico
- Regolazione velocità di stampa indipendente tramite Display touch
- Piano aspirante con regolazione micrometrica e bloccaggio magnetico o manuale
- Barra di sicurezza frontali e laterali
- Regolazione della corsa stampa tramite Display touch
- Temporizzazione partenza ciclo automatico e partenza ritorno per la copertura
- Contapezzi digitale crescente o decrescente
- Display touch con menù semplice ed intuitivo
- Possibilità di Industria 4.0

Modelli:

Mod. S 2 700 : 700x1000 mm

Dati tecnici:

Potenza	3 Kw
Voltaggio	400/230 V 50 Hz
Alimentazione pneumatica	6 Bar
Massimo spessore telaio	40 mm
Massimo spessore di stampa	20 mm

automatic screen printing machine S2



The ideal screen printing machine for print on all rigid and flexible materials.

S2-700 screen printing machine is equipped with a lot of dispositives and regulations:

- Pneumatic squeegee-scraper exchange
- Regulation of the inclination of the racle and of the manual scraper
- Height adjustable frame holder bars for out of contact
- Pneumatic frame detachment with manual adjustment
- Pneumatic frame locking
- 3 operating cycles manual, semi and automatic
- Independent print speed adjustment via touch display
- Suction plate with micrometric adjustment and magnetic or manual locking
- Front and side safety bar
- Adjustment of the print stroke via touch display
- Automatic cycle start timing and return start for the cover
- Increasing or decreasing digital piece counter
- Touch display with simple and intuitive menu
- Possibility of Industry 4.0

Modeis:

Mod. S 2 700 : 700x1000 mm

Technical data:

Power	3 Kw
Voltage	400/230 V 50 Hz
pneumatic power	6 Bar
Max. screen tickness	40 mm
Max. print thickness	20 mm

Ser.Tec - Via Emilio Salgari, 14/E

31056 Roncade (TV)

Tel. +39 (0)422 798184

Fax +39 (0)422 799711

e-mail : info@ser-tec.org - www.ser-tec.org

Dealer

